

ATALOG DECEMBRIE 2017



EVIDECORED QUARTZ AND DECORATIVE STONES

STONE CARPET







Properties:

It is a granular quartz with carefully selected granulometry, artificially colored by angobar method on the surface of the granule, using a color technology system with a protected technology, property of EVIDECOR COMPANY SRL.

Technical specifications:



Granulometry: 2-4 mm

Chemical: SiO2 min.97%, Fe2O3 max 0.25%, Al2O3max.0.6% ...

Way of ussage:

EVIDECOR - Natural or colored quartz is used at the execution of epoxy resin rugs with high requirements of wear resistance anti-slip and decorative.

PERIODICAL MAINTENANCE INSTRUCTIONS:

After the application and hardeneding of the carpet,in between 6 to 12 months (depending on traffic intensity), will be washed, dry naturally and sealed with transparent varnish 0.4 - 0.5 kg / m2.

Washing can be done with water under pressure, using amateur jet machines (avoid high pressures)

Dry naturally for at least 2.3 days until all the water from the washing process, has avaporated entirely and then the sealed of 0.4-0.5 kg / m2 will be applied.









CATALOG DECEMBRIE 2017



STONE CARPET

FINAL PROPERTIES OF THE DRIED QUARTZ STONE CARPER

The quartz stone carpet is an exclusive coverage, durable, and aesthetics of concrete surfaces.

Supports easy car traffic in parking areas. (max 3.5t) It is anti-slip and self-draining.

Supports frozen water de-icing system, the recommended temperature being max. 20-25 ° C. It is ideal for pedestrian areas around swimming pools because it can circulated with empty legs (it doesn't burn the soles).




Chemical strength:

Sodium hypochlorite 5.5% Excellent 0.63 Formaldehyde 10% 0.72 Excellent Ethanol 15% 0.98 Excellent Ethanol 95% 7.22 Good **Butyl acetate 20.88 Mild** Gasoline 0.20 Excellent Xilen 6.20 Good Sodium hydroxide 10% 0.63 Excellent Lactic Acid 10% 2.31 Very good Acetic acid 10% Excellent 1.23 Sulfuric acid 10% 1.42 Very good Sulfuric acid 50% Excellent 0.41 Phosphoric acid 10% 2.28 Very good Nitric acid 10% 1.03 Excellent Ammonia 10% 0.67 Excellent Saltwater 0.1 Excellent










Mechanical strength:

Compressive strength N / mm2 (UNI429) 70
Compressive elasticity modulus N / mm2 (UNI429) 1110
Bending resistance N / mm2 (UNI 7219) 33
Bending resistance mode N / mm2 (UNI 7219) 1160
Traction resistance N / mm2 (ASTM D 638) 47
Tensile elongation% (ASTM D 638) 10.5



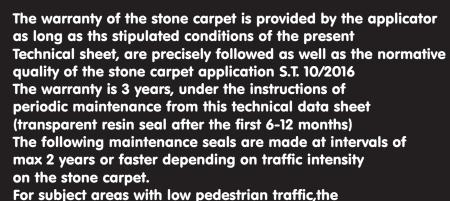

maintenance after 2 years can be done with sealing in smaller quantities, respectively 300 gr / sqm (square feet) or they can be sealed at intervals of 3 years.

The average life of the stone carpet is 10 years.

The manufacturer and applicator are exempt from any law obligation that derives from defective or unfit maintenance of the stone carpet, not in accordance with the present technical data and S.T.10 / 2016 by the owner of the carpet.

The manufacturer and applicator of the stone carpet, have the obligation to provide to the final beneficiary of the stone carpet, for a fee charge, complete necessary materials for the maintenance of the stone carpet for a perioud of 10 years!



















The EVIDECOR team:

With an experience of over 16 years, permanently open to innovation and new challenges. All horizontal and vertical finishing systems of EVIDECOR brand are created, stuied, tested and guaranteed by EVIDECOR COMPANY ROMANIA. Along with decorative finishes EVIDECOR, through the specialized team Ferma de Buburuze. a variety of works in design construction with personalized character can be executed. Rigips, installations, personalized decorations, including garden, garden arrangements and exclusivist green spaces.



CONTACT: http://www.evidecor.ro +40723642000 scrumaroma@gmail.com














OTHER REFERENCE WORKS:

Building of an oriel and garden arrangements.

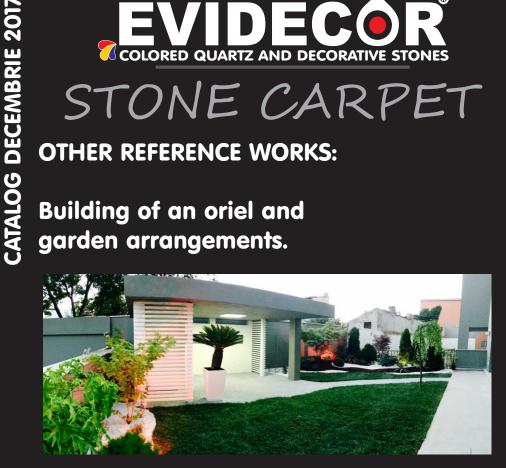

Wall collage













CATALOG DECEMBRIE 2017











STONE CARPET

OTHER REFERENCE WORKS:





